

CSAH 66 Sanitary Sewer Extension Project Newsletter

July 20, 2022

Construction of:

- Reconstruction of CSAH 66
- Sanitary Sewer Extension
- ADA Bituminous Trail
- Storm Sewer Replacement
- Stormwater Quality Improvements

Construction schedule:

Start: May 16th, 2022

Finish: August 31st, 2022

Andrew Beadell, P.E.
Project Engineer
Cell: 218-244-5928
E-mail: Andrew.beadell@bolton-menk.com

Phillip Martin, P.E.
Crosslake City Engineer
Cell: 218-821-7265


Casper Construction Inc.
Tom Alverson
Project Manager
Cell: 218-398-0706

Nathan Benson
Onsite Foreman
Cell: 218-398-0466



Alert

Contractor is set to begin Phase 2 on Monday July 25th. Removals of the existing road will take place starting right away Monday morning. Contractor will begin installation of sanitary sewer at the Daggett Pine Road intersection shortly thereafter. The map below shows how the Phase 2 work will be staged.

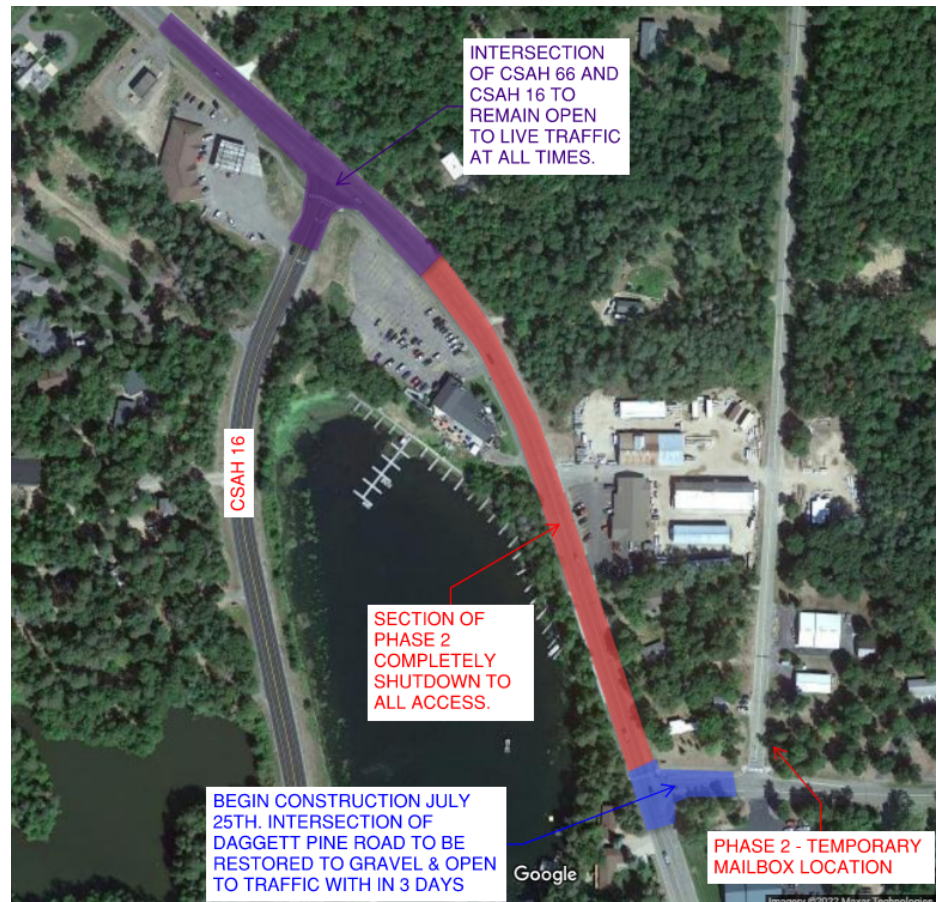

Access During Each Section of Phase 2:

1. Blue Area - Properties can be accessed from the north on CSAH 66.
2. Red Area - All properties have access from outside the red area. This section will be completely shutdown to help the contractor speed up their efforts.
3. Purple Area – Access to be provided from the south or the north based on the contractor's operations. The CSAH 16 & CSAH 66 intersection to always remain open to traffic.

CSAH 66 Sanitary Sewer Extension Project Newsletter



Alert All Properties

The City of Crosslake has a specific process for the installation of the private sanitary sewer service and the termination of the existing on-site sanitary sewer septic system.

- The existing tank must first be pumped dry.
- The existing tank needs to be fully removed or at a minimum the bottom of the tank needs to be crushed and filled with sand.
- The service line must meet Department of Labor & Industries Plumbing Code.
- Service line must be air tested and verified with city staff ahead of connection.
- Service line must be reviewed by city staff at the point of connection.
- Sewer Availability Charge must be paid at city hall ahead of connection.

Please contact the City of Crosslake City Hall to schedule the inspection by city staff. (218) 692-2688



Mail Service

Temporary mailbox locations for 37670 CSAH 66 and Simonson Lumber will be located at the intersection of Ox Lake Landing and Daggett Pine Road. All other mail deliveries will be unaffected.



Contacts

If you have not already, please contact Andrew to coordinate your desired sanitary sewer location to your property. If you have questions or concerns at any time, please contact the Project Engineer Andrew Beadell at the phone number listed.

Project updates will be posted on the City website. The City website can be accessed at <https://www.cityofcrosslake.org/>